



MitGlow

GLOW WITH MITGLOW

-  +91 9356073106
-  ecommerce@vasantgroup.com
-  www.mitglow.com

LED STREET LIGHT LENS

LED HIGH BAY LIGHTS

LED FLOOD LIGHTS

PANNEL LIGHTS

To meet the diverse requirements of our valuable clients, we are engaged in manufacturing, exporting, distributing, trading, supplying and service providing an exclusive range of highly efficient LED STREET LIGHTS LENS, LED FLOOD LIGHTS, HIGH BAY LIGHTS & PANNEL LIGHTS.

Widely appreciated in the market for our contemporary design and superior functionality, these LED lights are widely used. The designing and fabrication of these lights are done with the perfect blend of raw material and technology as per the latest market trends. These products are manufactured at our manufacturing unit, using the optimum grade factor inputs and latest technology in accordance with the set industrial quality norms.

These products are precisely engineered using advanced technology and high-quality raw material. Available with us in wide specifications, we supply these lights at budget-friendly rates. Further more, we make a supply of these products to our customers in durable packaging.



■ LED Lights

- ❑ LED lights are the most energy efficient source of Light right now, we take it even more seriously. We focus on providing un-compromised and high quality lighting solutions.
- ❑ We don't just provide the light, but we provide "Quality Light" that enhance the ambiance, visibility and safety of the Premise, which elevate the mood to work, rest, or Celebrate.
- ❑ We have special range of Flood lights and High bay Lights, which has been Specifically Designed and developed considering the technical requirement of sport Complexes(Outdoor) as well as Industrial Premises.
- ❑ These Lights Consist Special Quality Surge Protections, Specific Diffusers, Special Pt Lenses, and LEDs.

■ LED Lights

We are a reliable supplier, because we make sure that we pay at most attention to serve growing demands of our valued customers and keep them satisfied with our synergic team work, ultra modern manufacturing facilities :





Mitglow LED Street Light Lens

Model - MSSL-24W

S/L WATTS	24 WATT STREET LIGHT
REGISTER BRAND	MITGLOW LED
BODY MATERIAL	ALLUMINIUM CASTING (ADC 12)
CASTING DIMENTION	108X280X45 mm
DRIVER AREA	45X80X40mm
PIPE ID IN mm	45mm
LENS	PC
PRODUCT WEIGHT	0.462gm
PCB IN SIZE mm	60X110mm
LEDS USED	24 nos
PCB THICKNESS	1.6mm
LED TYPES	2835/1w/100ma
Lm/w	110lm/w
BEAM ANGLE	120

CCT	6500k
INPUT VOLTAGE	90-300v
INPUT CURRENT	0.240mA
FREQUENCY	50Hz
POWER FACTOR	0.99
SURGE PROTECTION	6kv
THERMAL CONDUCTIVITY	75° C
ISOLATION/NON-ISOLATION	ISOLATED
OUTPUT CURRENT	300mA
OUTPUT DC	60-80v DC
OUTPUT POWER	21.4W
DRIVER CASING	ALUMINIUM CASING IP 66
IP RATING	IP66



■ Mitglow LED Street Light Lens

Model - MSSL - 36W



S/L WATTS	36 WATT STREET LIGHT
REGISTER BRAND	MITGLOW LED
BODY MATERIAL	ALLUMINIUM CASTING (ADC 12)
CASTING DIMENTION	285X105X50mm
DRIVER AREA	70X105X40mm
PIPE ID IN mm	45mm
LENS	PC
PRODUCT WEIGHT	0.565gm
PCB IN SIZE mm	85X142mm
LEDS USED	36nos
PCB THICKNESS	1.6mm
LED TYPES	2835/1w/100ma
Lm/w	110lm/w
BEAM ANGLE	120

CCT	6500k
INPUT VOLTAGE	230v
INPUT CURRENT	0.240mA
FREQUENCY	50Hz
POWER FACTOR	>0.98
SURGE PROTECTION	6kv
THERMAL CONDUCTIVITY	75° C
ISOLATION/NON ISOLATION	ISOLATED
OUTPUT CURRENT	600mA
OUTPUT DC	40 to 60V
OUTPUT POWER	34.5W
DRIVER CASING	ALUMINIUM CASING IP 66
IP RATING	IP66



■ Mitglow LED Street Light Lens

Model - MSL - 50W

S/L WATTS	50 WATT STREET LIGHT
REGISTER BRAND	MITGLOW LED
BODY MATERIAL	ALLUMINIUM CASTING (ADC 12)
CASTING DIMENTION	162X395X45mm
DRIVER AREA	90X140X40mm
PIPE ID IN mm	45mm
LENS	PC
PRODUCT WEIGHT	0.900gm
PCB IN SIZE mm	112X160mm
LEDS USED	50 nos
PCB THICKNESS	1.6mm
LED TYPES	2835/1w/100ma
Lm/w	110lm/w
BEAM ANGLE	120

CCT	6500k
INPUT VOLTAGE	90-300V
INPUT CURRENT	0.24A
FREQUENCY	50Hz
POWER FACTOR	0.99
SURGE PROTECTION	6kv
THERMAL CONDUCTIVITY	75° C
ISOLATION/NON ISOLATION	ISOLATED
OUTPUT CURRENT	750 mA
OUTPUT DC	50-70vdc
OUTPUT POWER	46 w
DRIVER CASING	ALUMINIUM CASING IP 66
IP RATING	IP66



Mitglow LED Street Light Lens

Model - MSSL - 100W

S/L WATTS	100 WATT STREET LIGHT
REGISTER BRAND	MITGLOW LED
BODY MATERIAL	ALLUMINIUM CASTING (ADC 12)
CASTING DIMENTION	192X480X70mm
DRIVER AREA	110X170X60mm
PIPE ID IN mm	45mm
LENS	PC
PRODUCT WEIGHT	1.475gm
PCB IN SIZE mm	148x192mm
LEDS USED	96 nos
PCB THICKNESS	1.6mm
LED TYPES	2835/1w/100ma
lm/w	110lm/w
BEAM ANGLE	120

CCT	6500k
INPUT VOLTAGE	90-300 V
INPUT CURRENT	0.24A
FREQUENCY	50Hz
POWER FACTOR	0.99
SURGE PROTECTION	6kv
THERMAL CONDUCTIVITY	55
ISOLATION/NON ISOLATION	ISOLATED
OUTPUT CURRENT	750 mA
OUTPUT DC	50-70 vdc
OUTPUT POWER	93 w
DRIVER CASING	ALUMINIUM CASING IP 66
IP RATING	IP66




Mitglow LED Flood Light

Model - MFLDC - 50W

F/L WATTS	50 WATT FLOOD LIGHT
REGISTER BRAND	MITGLOW LED
BODY MATERIAL	ALLUMINIUM CASTING (ADC 12)
CASTING DIAMENTION	232X180X32mm
DRIVER AREA	DOWN CHOKE
PIPE ID IN mm	N/A
GLASS	4mm
TOTAL WEIGHT	1.224gm
PCB IN SIZE mm	144X98
LEDS USED	49nos
PCB THICKNESS	1.6mm
LED TYPES	2835/1w/100ma
REFLECTOR TYPES	PC WHITE
Lm/w	110lm/w

BEAM ANGLE	120
CCT	6500k
INPUT VOLTAGE	90-300v
INPUT CURRENT	0.24A
FREQUENCY	50Hz
POWER FACTOR	0.99
SURGE PROTECTION	6kv
THERMAL CONDUCTIVITY	75° C
ISOLATION/NON ISOLATION	ISOLATED
OUTPUT CURRENT	300ma
OUTPUT DC	60-80v DC
OUTPUT POWER	46W
DRIVER CASING	ALUMINIUM CASING IP 66
IP RETING	IP66

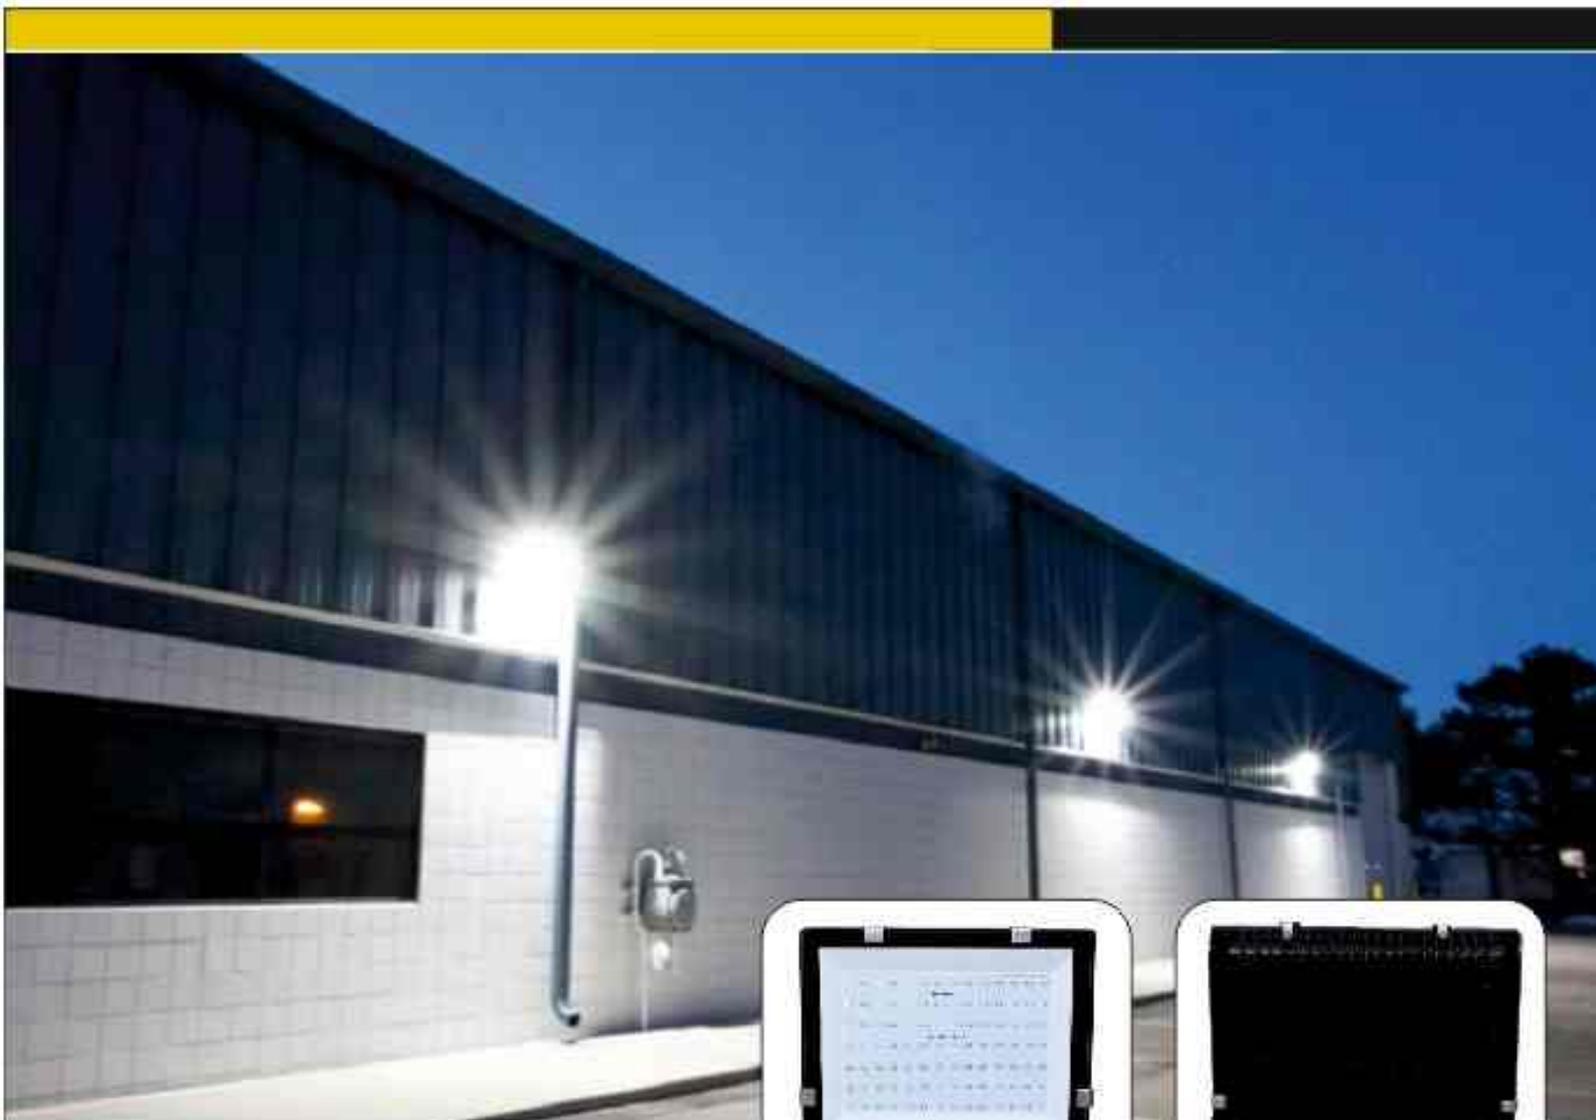

■ Mitglow LED Flood Light

Model - MFLDC - 100W



F/L WATTS	100 WATT FLOOD LIGHT
REGISTER BRAND	MITGLOW LED
BODY MATERIAL	ALLUMINIUM CASTING (ADC 12)
CASTING DIAMENTION	285X105X50mm
DRIVER AREA	DOWN CHOCK
PIPE ID IN mm	N/A
GLASS	4mm
TOTAL WEIGHT	1.224gm
PCB IN SIZE mm	197X150
LEDS USED	98nos
PCB THICKNESS	1.6mm
LED TYPES	2835/1w/100ma
REFLECTOR TYPES	PC WHITE
Lm/w	110lm/w

BEAM ANGLE	120
CCT	6500k
INPUT VOLTAGE	90-300v
INPUT CURRENT	0.36A
FREQUENCY	50Hz
POWER FACTOR	>0.98
SURGE PROTECTION	6kv
THERMAL CONDUCTIVITY	75° C
ISOLATION/NON ISOLATION	ISOLATED
OUTPUT CURRENT	300ma
OUTPUT DC	50-60v DC
OUTPUT POWER	90W
DRIVER CASING	ALUMINIUM CASING IP 66
IP RETING	IP66




Mitglow LED Flood Light

Model - MFLDC - 150W



F/L WATTS	150 WATT FLOOD LIGHT
REGISTER BRAND	MITGLOW LED
BODY MATERIAL	ALLUMINIUM CASTING (ADC 12)
CASTING DIAMENTION	285X105X50mm
DRIVER AREA	DOWN CHOCK
PIPE ID IN mm	N/A
GLASS	4mm
TOTAL WEIGHT	1.224gm
PCB IN SIZE mm	197X150
LEDS USED	147nos
PCB THICKNESS	1.6mm
LED TYPES	2835/1w/100ma
REFLECTOR TYPES	PC WHITE
Lm/w	110lm/w

BEAM ANGLE	120
CCT	6500k
INPUT VOLTAGE	90-300v
INPUT CURRENT	0.36A
FREQUENCY	50Hz
POWER FACTOR	>0.98
SURGE PROTECTION	6kv
THERMAL CONDUCTIVITY	75° C
ISOLATION/NON ISOLATION	ISOLATED
OUTPUT CURRENT	300ma
OUTPUT DC	50-60v DC
OUTPUT POWER	90W
DRIVER CASING	ALUMINIUM CASING IP 66
IP RETING	IP66

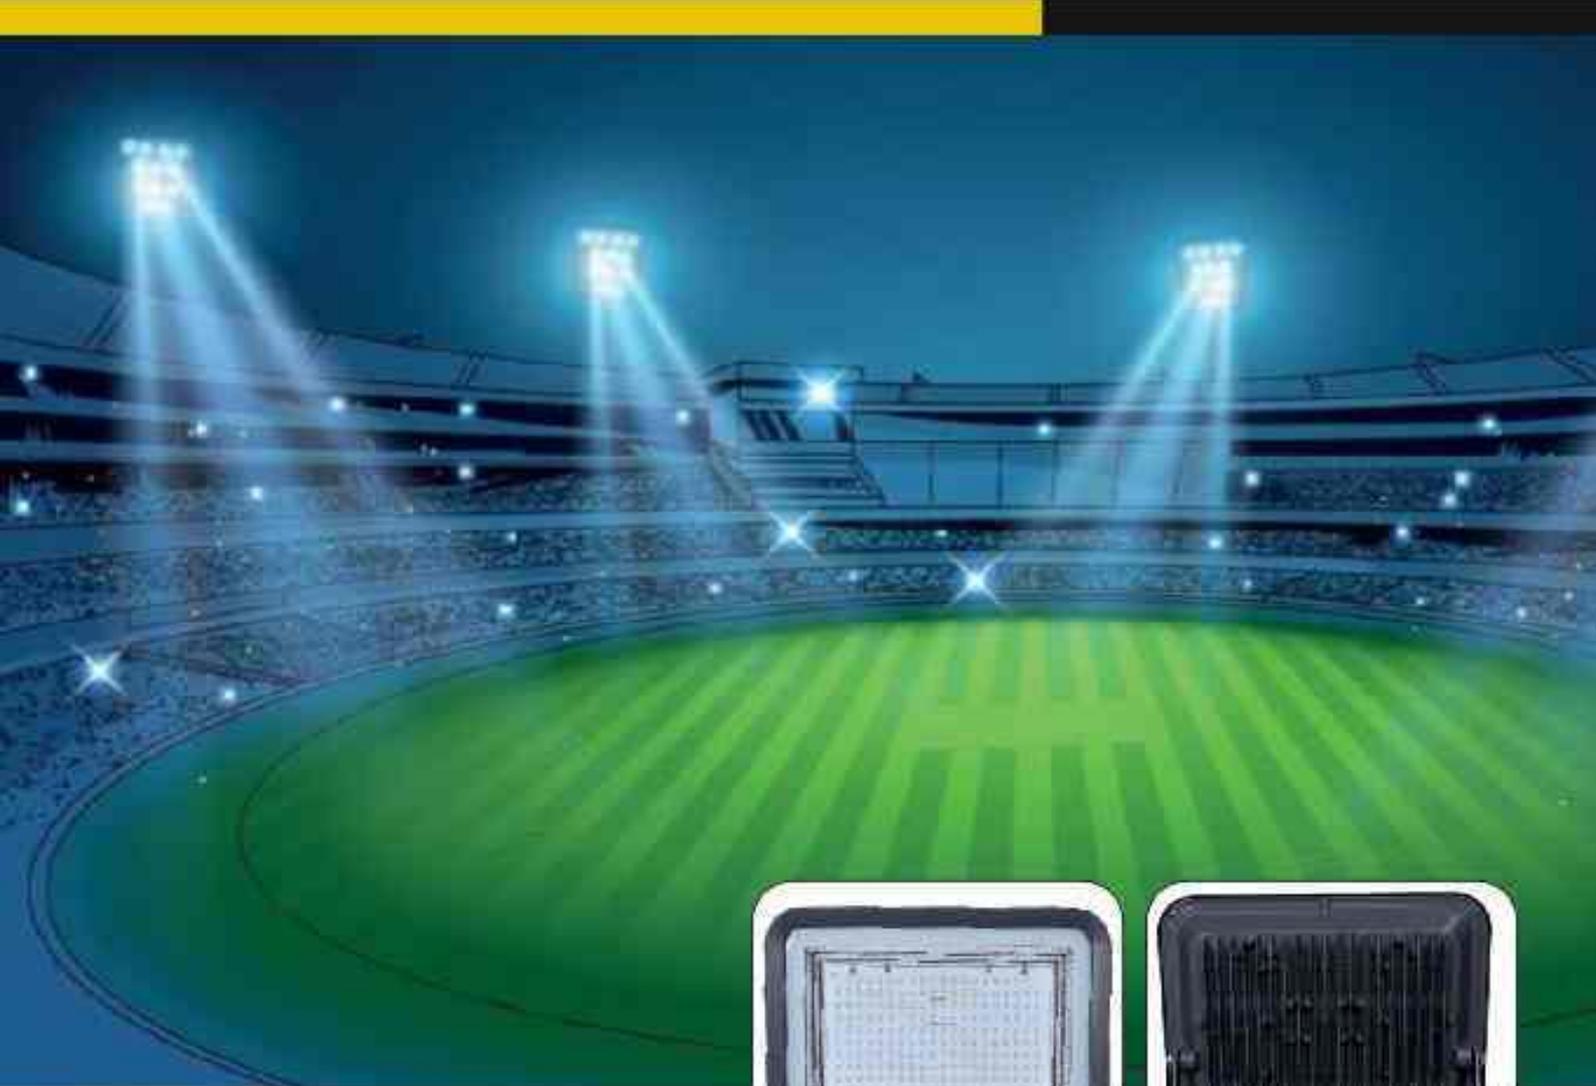

Mitglow LED Flood Light

Model - MFLDC - 200W



F/L WATTS	200 WATT FLOOD LIGHT	BEAM ANGLE	120
REGISTER BRAND	MITGLOW LED	CCT	6500k
BODY MATERIAL	ALLUMINIUM CASTING (ADC 12)	INPUT VOLTAGE	90-300v
CASTING DIAMENTION	345x325x80 mm	INPUT CURRENT	0.36A
DRIVER AREA	DOWN CHOCK.	FREQUENCY	50Hz
PIPE ID IN mm	N/A	POWER FACTOR	>0.98
GLASS	4mm	SURGE PROTECTION	6kv
TOTAL WEIGHT	2.244gm	THERMAL CONDUCTIVITY	75° C
PCB IN SIZE mm	197X150	ISOLATION/NON ISOLATION	ISOLATED
LEDS USED	196 nos	OUTPUT CURRENT	300ma
PCB THICKNESS	1.6mm	OUTPUT DC	50-70v DC
LED TYPES	2835/1w/100ma	OUTPUT POWER	180W
REFLECTOR TYPES	PC WHITE	DRIVER CASING	ALUMINIUM CASING IP 66
Lm/w	110lm/w	IP RETING	IP66



Mitglo LED Flood Light Warm White

Model - MFLDC - 50W

F/L WATTS	50 WATT FLOOD LIGHT
REGISTER BRAND	MITGLOW LED
BODY MATERIAL	ALLUMINIUM CASTING (ADC 12)
CASTING DIAMENTION	232X180X32mm
DRIVER AREA	DOWN CHOKE
PIPE ID IN mm	N/A
GLASS	4mm
TOTAL WEIGHT	1.224gm
PCB IN SIZE mm	144X98
LEDS USED	49nos
PCB THICKNESS	1.6mm
LED TYPES	2835/1w/100ma
REFLECTOR TYPES	PC WHITE
Lm/w	110lm/w

BEAM ANGLE	120
CCT	3000-4000k
INPUT VOLTAGE	90-300v
INPUT CURRENT	0.24A
FREQUENCY	50Hz
POWER FACTOR	0.99
SURGE PROTECTION	6kv
THERMAL CONDUCTIVITY	75° C
ISOLATION/NON ISOLATION	ISOLATED
OUTPUT CURRENT	300ma
OUTPUT DC	60-80v DC
OUTPUT POWER	46W
DRIVER CASING	ALUMINIUM CASING IP 66
IP RETING	IP66



Mitglow LED Flood Light Warm White

Model - MFLDC - 100W



F/L WATTS	100 WATT FLOOD LIGHT	BEAM ANGLE	120
REGISTER BRAND	MITGLOW LED	CCT	3000-4000k
BODY MATERIAL	ALLUMINIUM CASTING (ADC 12)	INPUT VOLTAGE	90-300v
CASTING DIAMENTION	285X105X50mm	INPUT CURRENT	0.36A
DRIVER AREA	DOWN CHOCK	FREQUENCY	50Hz
PIPE ID IN mm	N/A	POWER FACTOR	>0.98
GLASS	4mm	SURGE PROTECTION	6kv
TOTAL WEIGHT	1.224gm	THERMAL CONDUCTIVITY	75° C
PCB IN SIZE mm	197X150	ISOLATION/NON ISOLATION	ISOLATED
LEDS USED	98nos	OUTPUT CURRENT	300ma
PCB THICKNESS	1,6mm	OUTPUT DC	50-60v DC
LED TYPES	2835/1w/100ma	OUTPUT POWER	90W
REFLECTOR TYPES	PC WHITE	DRIVER CASING	ALUMINIUM CASING IP 66
Lm/w	110lm/w	IP RETING	IP66



Mitglow LED Flood Light Warm White

Model - MFLDC - 150W



F/L WATTS	150 WATT FLOOD LIGHT
REGISTER BRAND	MITGLOW LED
BODY MATERIAL	ALLUMINIUM CASTING (ADC 12)
CASTING DIAMENTION	285X105X50mm
DRIVER AREA	DOWN CHOCK
PIPE ID IN mm	N/A
GLASS	4mm
TOTAL WEIGHT	1.224gm
PCB IN SIZE mm	197X150
LEDS USED	147nos
PCB THICKNESS	1.6mm
LED TYPES	2835/1w/100ma
REFLECTOR TYPES	PC WHITE
Lm/w	110lm/w

BEAM ANGLE	120
CCT	3000-4000k
INPUT VOLTAGE	90-300v
INPUT CURRENT	0.36A
FREQUENCY	50Hz
POWER FACTOR	>0.98
SURGE PROTECTION	6kv
THERMAL CONDUCTIVITY	75 ^o C
ISOLATION/NON ISOLATION	ISOLATED
OUTPUT CURRENT	300ma
OUTPUT DC	50-60v DC
OUTPUT POWER	90W
DRIVER CASING	ALUMINIUM CASING IP 66
IP RETING	IP66



■ Mitglow LED High Bay Light With Lens

As their name implies, high-bay lights are used to illuminate spaces with high ceilings. That usually means ceilings ranging from 20 feet to approximately 45 feet. Low-bay lights, on the other hand, are used for ceilings 20 feet and under. Because a high-ceiling location has more space to fill, a high-bay by definition is a powerful light source that can brighten up a large area. The Right high-bay lighting choice can increase safety while maximizing energy efficiency and boosting productivity.

Model - MHBL - 50W

H/L WATT	50 Watt
PRODUCT WEIGHT	1.25 kg
FREQUENCY	50 Hzs
POWER FACTOR	0.99
DRIVER CASING	ALUMINIUM CASING
IP RATING	IP 65
VOLTAGE	Vin 230 VAC
LUMENS	5000 lm
EFFICIENCY	>=89%
LED TYPE	5050
NO. OF LED'S	12 NOS





■ Mitglow LED High Bay Light With Lens

Model - MHBL - 100W

H/L WATT	100 Watt
PRODUCT WEIGHT	2.65 kg
FREQUENCY	50 Hzs
POWER FACTOR	0.99
DRIVER CASING	ALUMINIUM CASING
IP RATING	IP 65
VOLTAGE	Vin 230 VAC
LUMENS	10000 lm
EFFICIENCY	$\geq 89\%$
LED TYPE	5050
NO. OF LED'S	24 NOS





■ **Mitglow LED High Bay Light With Lens**

Model - MHBL - 150W

H/L WATT	150 Watt
PRODUCT WEIGHT	4.78 kg
FREQUENCY	50 Hz
POWER FACTOR	0.99
DRIVER CASING	ALUMINIUM CASING
IP RATING	IP 65
VOLTAGE	Vin 230 VAC
LUMENS	15000 lm/w
EFFICIENCY	>=89%
LED TYPE	5050
NO. OF LED'S	45 NOS



■ Mitglow LED High Bay Light With Lens

Model - MHBL - 200W

H/L WATT	200 Watt
PRODUCT WEIGHT	6.30 kg
FREQUENCY	50 Hz
POWER FACTOR	0.99
DRIVER CASING	ALUMINIUM CASING
IP RATING	IP 65
VOLTAGE	Vin 230 VAC
LUMENS	20000 lm/w
EFFICIENCY	$\geq 89\%$
LED USED	5050
NO. OF LED'S	44 NOS



■ Eco Mitglow LED High Bay Light With Lens

Model - EMHBL - 100W

H/L WATT	100 Watt
PRODUCT WEIGHT	2.65 kg
FREQUENCY	50 Hzs
POWER FACTOR	0.99
DRIVER CASING	ALUMINIUM CASING
IP RATING	IP 65
VOLTAGE	Vin 230 VAC
LUMENS	10000 lm
EFFICIENCY	>=89%
LED USED	2835
NO. OF LED'S	100 NOS





■ Eco Mitglow LED High Bay Light With Lens

Model - EMHBL - 150W

H/L WATT	150 Watt
PRODUCT WEIGHT	4.78 kg
FREQUENCY	50 Hz
POWER FACTOR	0.99
DRIVER CASING	ALUMINIUM CASING
IP RATING	IP 65
VOLTAGE	Vin 230 VAC
LUMENS	15000 lm
EFFICIENCY	$\geq 89\%$
LED USED	2835
NO. OF LED'S	150 NOS





■ Eco Mitglow LED High Bay Light With Lens

Model - EMHBL - 200W

H/L WATT	200 Watt
PRODUCT WEIGHT	6.30 kg
FREQUENCY	50 Hz
POWER FACTOR	0.99
DRIVER CASING	ALUMINIUM CASING
IP RATING	IP 65
VOLTAGE	Vin 230 VAC
LUMENS	20000 lm/w
EFFICIENCY	$\geq 89\%$
LED USED	2835
NO. OF LED'S	200 NOS





■ 2x2 Back Panel Light

► 2x2 Back Pannel Light Cool White



- Product Catagery : Led Commercial Lighting
- System Wattage : 36W and 45W
- Lumen Output : Sleek Backlit Design with 100Lm/W efficacy
- Life Time : 25000 hours
- Correrelated Colour Temperature : 6500K
- Input voltage Range 220-240VAC
- Built in surge Protection :6KV

► 2x2 Back Pannel Light Warm White



- Product Catagery : Led Commercial Lighting
- System Wattage : 36W and 45W
- Lumen Output : Sleek Backlit Design with 100Lm/W efficacy
- Life Time : 25000 hours
- Correrelated Colour Temperature : 3000-4000K
- Input voltage Range 220-240VAC
- Built in surge Protection :6KV





Manufactured By :

MITTAL PRECISION PRESSURE DIE CASTING LLP

📍 PAP-G-36, MIDC, Chakan Phase-II, Village - Savardar, Tal. Khed, Dist. Pune - 410501

☎ 9356073106 ✉ ecommerce@vasantgroup.com



Marketed By :

NAVBHARAT MART PVT LTD

Plot No. 44, Sector No -10, PCNTDA, Bhosari, Pune-411026

☎ 90497 37747 ✉ manish@vasantgroup.com

☎ +91 9356073106

✉ ecommerce@vasantgroup.com

🌐 www.mitglow.com


MitGlow
BLOW WITH MITGLOW